




John C Wilkins  
Acoustic Supplies

## DATA SHEET

# JCW ACOUSTIC DECK 19

## THE PRODUCT

JCW Acoustic Deck 19 is only 19mm thick so is ideal where construction height must be kept to an absolute minimum. It can be used with both timber and concrete floors, as well as in new build and refurbishment projects. It complies with Part E of the Building Regulations and is certified for use with relevant Robust Detail floor constructions. This product is economical, easy to install and always available for fast delivery nationwide.

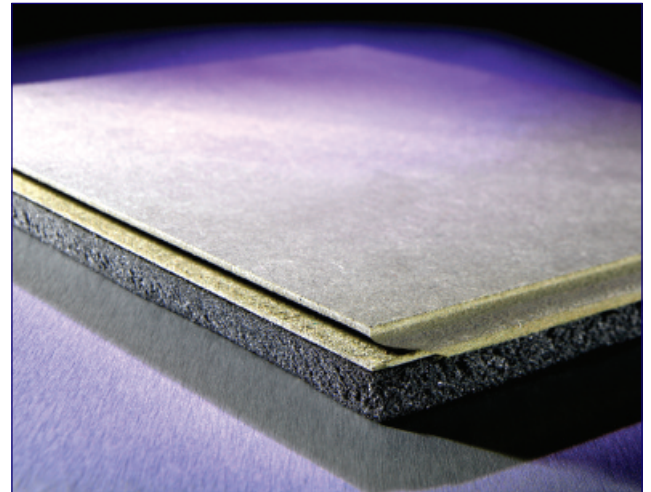

## THE FACTS

- Resilient overlay shallow platform floor system (type FFT5), comprising a 10mm acoustic layer pre-bonded to 9mm moisture-resistant MDF.
- For use with Robust Detail floor construction types E-FC-1, E-FC-2 and E-FS-1 (steel floor).
- Tested in accordance with BS EN 140-6 > 17dB and therefore requires no pre-completion testing.
- deal for pre-cast, beam&block and timber floors.
- JCW Perimeter Flanking Band must be used to ensure compliance.

## SPECIFICATION

Deck 19 Composition	10mm acoustic foam and 9mm moisture-resistant MDF
Thickness	19mm
Board Size	1200mm x 600mm
RSD compliance requirement	$\text{dB}\Delta L_w$ : 17dB
JCW Acoustic Deck 19 rating	$\text{dB}\Delta L_w$ : 18dB

## INSTALLATION

*Please find all installation advice in our separate guide.*

For expert installation, we offer our own installation service anywhere in the UK. Your installation will be performed to the highest standards by skilled and experienced tradesmen. These experts understand the importance of fitting acoustic materials absolutely perfectly, and they have the specialist skills to ensure your JCW materials are fitted correctly every time. As they are both experienced and skilled, they are also able to provide a highly efficient and extremely cost-effective service.

For further details, call John C Wilkins Acoustic Installations on 01204 387 029.

